PROPOSED REPORT
March 2007

Total Maximum Daily Load

Biological Impairment Due to Nutrients and Organic Enrichment / Low Dissolved Oxygen

For

Five Creeks Drainage Area

Cypress Creek

Deer Creek &

Waleasheba Creek

Big Black River Basin

Yazoo County, Mississippi

Prepared By

Mississippi Department of Environmental Quality
Office of Pollution Control
TMDL/WLA Branch

MDEQ
PO Box 10385
Jackson, MS 39289-0385
(601) 961-5171
www.deq.state.ms.us

Mississippi Department of Environmental Quality

FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for water body segments found on Mississippi's 1996 Section 303(d) List of Impaired Water bodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in landuse within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Conversion Factors

To convert from	To	Multiply by	To convert from	To	Multiply by
$mile^2$	acre	640	acre	ft^2	43560
km^2	acre	247.1	days	seconds	86400
m^3	ft^3	35.3	meters	feet	3.28
ft^3	gallons	7.48	ft^3	gallons	7.48
ft^3	liters	28.3	hectares	acres	2.47
cfs	gal/min	448.8	miles	meters	1609.3
cfs	MGD	0.646	tonnes	tons	1.1
m^3	gallons	264.2	µg/l * cfs	gm/day	2.45
m^3	liters	1000	µg/l * MGD	gm/day	3.79

Fraction	Prefix	Symbol	Multiple	Prefix	Symbol
10^{-1}	deci	d	10	deka	da
10^{-2}	centi	c	10^2	hecto	h
10^{-3}	milli	m	10^3	kilo	k
10^{-6}	micro	:	10^6	mega	M
10^{-9}	nano	n	10^9	giga	G
10^{-12}	pico	p	10^{12}	tera	T
10^{-15}	femto	f	10^{15}	peta	P
10^{-18}	atto	a	10^{18}	exa	E

TABLE OF CONTENTS

FIGURES

TABLES

TMDL INFORMATION PAGE

Table 1. Listing Information

Name	ID	County	HUC	Cause	Stressors
Cypress Creek	MS433CE	Yazoo	08060202	Biological Impairment	Nutrients and Organic Enrichment / Low Dissolved Oxygen
Deer Creek	MS433DE	Yazoo	08060202	Biological Impairment	Nutrients and Organic Enrichment / Low Dissolved Oxygen
Waleasheba Creek	MS433WE	Yazoo	08060202	Biological Impairment	Nutrients and Organic Enrichment / Low Dissolved Oxygen
Location: Near Bentonia from headwaters to mouth at the Big Black River					

Table 2. Water Quality Standards

Parameter	Beneficial use	Water Quality Criteria
Nutrients	Aquatic Life Support	Waters shall be free from materials attributable to municipal, industrial, agricultural, or other dischargers producing color, odor, taste, total suspended solids, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated uses.
Dissolved Oxygen	Aquatic Life Support	DO concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l

Table 3. Total Maximum Daily Load for Cypress Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	130.0 – 238.4	Implicit	130.0 – 238.4
Total Phosphorous	0.0	8.7 – 34.7	Implicit	8.7 – 34.7

Table 4. Total Maximum Daily Load for Deer Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	82.5 – 151.2	Implicit	82.5 – 151.2
Total Phosphorous	0.0	5.5 – 22.0	Implicit	5.5 – 22.0

Table 5. Total Maximum Daily Load for Waleasheba Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	175.5 – 321.8	Implicit	165.0 – 192.5
Total Phosphorous	0.0	11.7 – 46.8	Implicit	6.1 – 10.1

EXECUTIVE SUMMARY

This TMDL has been developed for a the Five Creeks Drainage Area placed on the Mississippi 1996 Section 303(d) List of Impaired Water Bodies due to evaluated causes of organic enrichment / low dissolved oxygen and nutrients. MDEQ completed Biological monitoring on each of the five creeks in the watershed and each creek is impaired for biology. A Stressor Identification Report which indicates the predominant stressors to the water body was developed for each stream. It was determined that organic enrichment/low dissolved oxygen and nutrients are probable primary stressors in three of the five streams. Sediment was found to be the probable primary stressor in the other two streams, Indian Creek and Pickett Creek, and will be addressed in a separate TMDL report. This TMDL will provide an estimate of the total nitrogen (TN) and total phosphorus (TP) allowable in the streams.

Mississippi does not have water quality standards for allowable nutrient concentrations. MDEQ currently has a Nutrient Task Force (NTF) working on the development of criteria for nutrients. An annual concentration range of 0.6 to 1.1 mg/l is an applicable target for TN and 0.04 to 0.16 mg/l for TP for water bodies located in Ecoregion 74. MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of numeric nutrient criteria.

The Five Creeks Watershed is located in HUC 080060202 near Bentonia in Yazoo County. Cypress Creek flows for 14.5 miles in a south-southwest direction from intermittent headwaters to a braided confluence with the Big Black River. Deer Creek flows in a southern direction from intermittent headwaters to a braided confluence with the Big Black River. Waleasheba Creek flows 8.4 miles in a southern direction from intermittent headwaters to the confluence with the Big Black River.

Because the critical 7Q10 flow of Cypress, Deer, and Waleasheba Creeks is zero, a predictive model was not needed to determine that this stream is not an appropriate receiving water body for waste water effluent. The TBODu TMDL was set to zero. The limited nutrient data and estimated existing ecoregion concentrations indicates reductions of nutrients are needed.

Figure 1. Five Creeks Drainage Area

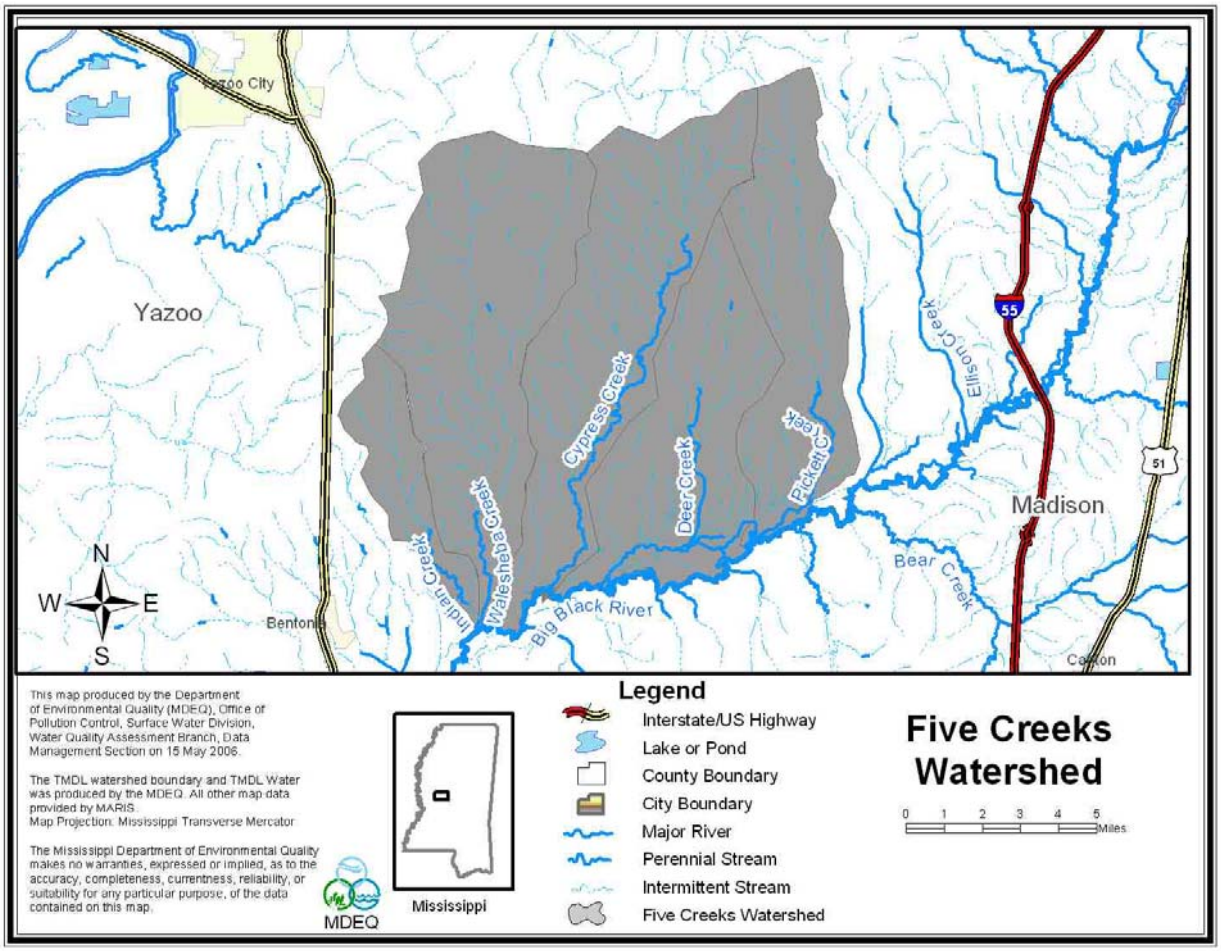

INTRODUCTION

1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. This TMDL has been developed for three of the 2004 §303(d) listed segments shown in Figure 2, MS433WE, MS433CE, and MS433DE.

Figure 2. Five Creeks Drainage Area §303(d) Listed Segments

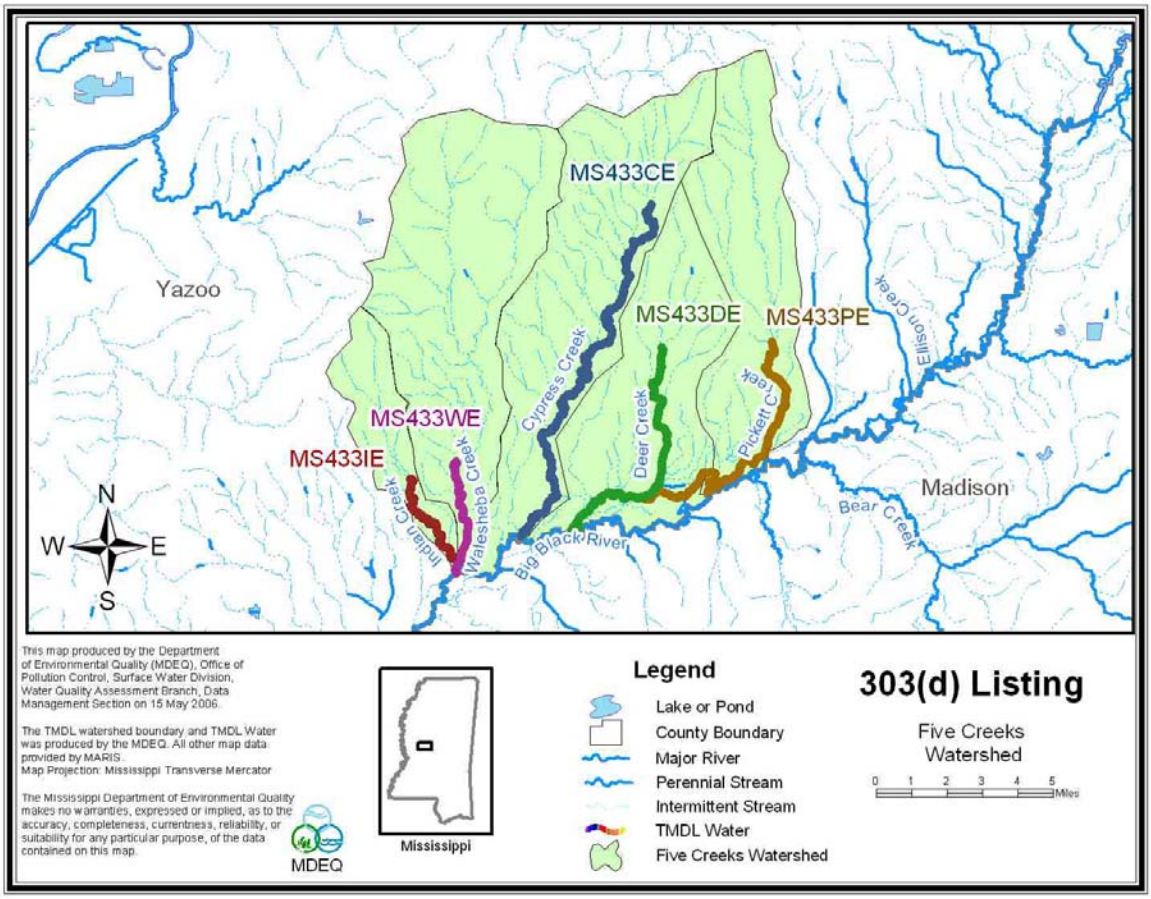

When MDEQ began listing impaired water bodies, the drainage area was listed in instances where evaluated information was the basis for the listing decision. The Five Creeks Drainage Area is a small watershed in the center of the Big Black River Watershed shown in Figure 2.

Figure 3. Wildlife in Waleasheba Creek

The five streams are:

- Cypress Creek
- Deer Creek
- Indian Creek
- Pickett Creek
- Waleasheba Creek

The original listing was for the drainage area. In 1998, MDEQ changed the practice of listing drainage areas and in consultation with EPA Region 4, these five streams were individually listed. There were no monitoring data, so the streams remained on the evaluated portion of Mississippi's §303(d) list. MDEQ began a biological monitoring program, the M-BISQ, to monitor these and other evaluated streams to confirm water quality based on the health of the biology in the stream. All five of these water bodies were confirmed as impaired based on the biology. Stressor Identification reports were completed to determine what the specific stressors were. Sediment was found to be a probable primary stressor for all five streams. The sediment TMDL for these streams will be completed separately. Cypress Creek, Deer Creek, and Waleasheba Creek were found to also have organic enrichment and nutrients as probable primary stressors. This TMDL will address organic enrichment and nutrients in Cypress, Deer, and Waleasheba Creeks.

1.2 Stressor Identification

The impaired segments were listed due to failure to meet minimum water quality criteria for biological use support based on biological sampling (MDEQ, 2003). Because of these results, a detailed assessment of the watershed and potential pollutant sources, called a stressor identification report, was developed for each stream. The purpose of a stressor identification report is to identify the stressors and their sources most likely causing degradation of instream biological conditions. The report indicated that organic enrichment and nutrients were probable primary stressors for Cypress, Deer, and Waleasheba Creeks (MDEQ, 2006).

There are no state criteria in Mississippi for nutrients. These criteria are currently being developed by the Mississippi Nutrient Task Force in coordination with EPA Region 4. MDEQ proposed a work plan for nutrient criteria development that has been approved by EPA and is on schedule according to the approved plan in development of nutrient criteria (MDEQ, 2004). Data were collected for wadeable streams to calculate the nutrient criteria.

For this TMDL, MDEQ is presenting preliminary target ranges for TN and TP even though the limited data available only indicate issues with TN. An annual concentration range of 0.6 to 1.1 mg/l is an applicable target for TN and 0.04 to 0.16 mg/l for TP for water bodies located in Ecoregion 74. However, MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of nutrient criteria, when the work of the NTF is complete.

1.3 Applicable Water Body Segment Use

The water use classifications are established by the State of Mississippi in the document *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003). The designated beneficial use for the listed segments is fish and wildlife support.

1.4 Applicable Water Body Segment Standard

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003).

Mississippi's current standards contain a narrative criteria that can be applied to nutrients which states "*Waters shall be free from materials attributable to municipal, industrial, agricultural, or other discharges producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated use* (MDEQ, 2002)." In the 1999 Protocol for Developing Nutrient TMDLs, EPA suggests several methods for the development of numeric criteria for nutrients (USEPA, 1999). In accordance with the 1999 Protocol, "The target value for the chosen indicator can be based on: comparison to similar but unimpaired waters; user surveys; empirical data summarized in classification systems; literature values; or professional judgment." MDEQ believes the most economical and scientifically defensible method for use in Mississippi is a comparison between similar but unimpaired waters within the same region. This method is dependent on adequate data which are being collected in accordance with the EPA approved plan. The initial phase of the data collection process for wadeable streams is complete.

1.5 Nutrient Target Development

Nutrient data were collected quarterly at 99 discrete sampling stations state wide where biological data already existed. These stations were identified and used to represent a range of stream reaches according to biological health status, geographic location (selected to account for ecoregion, bioregion, basin and geologic variability) and streams that potentially receive non-point source pollution from urban, agricultural, and silviculture lands as well as point source pollution from NPDES permitted facilities.

Nutrient concentration data were not normally distributed; therefore, data were log transformed for statistical analyses. Data were evaluated for distinct patterns of various data groupings (stratification) according to natural variability. Only stations that were characterized as "least

disturbed" through a defined process in the M-BISQ process (M-BISQ 2003) or stations that resulted in a biological impairment rating of "fully attaining" were used to evaluate natural variability of the data set. Each of these two groups was evaluated separately ("least disturbed sites" and "fully attaining sites). Some stations were used in both sets, in other words, they were considered "least disturbed" and "fully attaining". The number of stations considered "least disturbed" was 30 of 99, and the number of stations considered "fully attaining" was 53 of 99.

Several analysis techniques were used to evaluate nutrient data. Graphical analyses were used as the primary evaluation tool. Specific analyses used included; scatter plots, box plots, Pearson's correlation, and general descriptive statistics.

In general, natural nutrient variability was not apparent based on box plot analyses according to the 4 stratification scenarios. Bioregions were selected as the stratification scheme to use for TMDLs in the Pascagoula Basin. However, this was not appropriate for some water bodies in smaller bioregions. Therefore, MDEQ now uses ecoregions as a stratification scheme for the water bodies in the remainder of the state.

In order to use the data set to determine possible nutrient thresholds, nutrient concentrations were evaluated as to their correlation with biological metrics. That thorough evaluation was completed prior to the Pascagoula River Basin TMDLs. The methodology and approach were verified. The same methodology was applied to the subsequent bioregions and ecoregions.

For the preliminary target concentration range for each ecoregion, the 75th and 90th percentiles were derived from the mean nutrient value at each site found to be fully supporting of aquatic life support according to the M-BISQ scores. For the estimate of the existing concentrations the 50th percentile (median) was derived from the mean nutrient value at each site of sites that were not attaining and had nutrient concentrations greater than the target.

WATER BODY ASSESSMENT

2.1 Instream Water Quality Data

2.1.1 Cypress Creek Water Quality Data

Nutient data for Cypress Creek were gathered and reviewed. Data exist for the §303(d)-listed segment of Cypress Creek based on samples collected in the creek during the §303(d)/M-BISQ monitoring project at site #222 in 2001 with additional water quality sampling done in 2004 given in Table 7. Site #222 is located at Nod in Yazoo County upstream of the Scotland Road bridge crossing. Data also exist at the ambient monitoring station #BB111 in 2000 located on Cypress Creek near Myrleville in Yazoo County given in Table 8. Additionally, nutrient data exists for Cypress Creek at two special study stations, given in Table 9. The average of this data for TN is 1.58 mg/l, which is greater than the target concentration range for ecoregion 74. The average of this data for TP is 0.43 mg/l, which also is greater than the target concentration range for this ecoregion.

Table 7. Water Quality Data Collected at Cypress Creek, M-BISQ Station #222

Date	Time	TN (mg/l)	TP (mg/l)
2/19/01	7:50	1.47	0.17
4/6/04	15:10	0.67	0.1
4/26/04	9:00	1.28	0.15
8/31/04	8:30	1.94	0.99
9/23/04	15:45	2.27	1.3

Table 8. Water Quality Data Collected at Cypress Creek, Ambient Station #BB111

Date	Time	TN (mg/l)	TP (mg/l)
2/10/00	10:09	2.26	0.26
4/6/00	10:17	2.18	0.43
6/29/00	9:29	1.78	0.43

Table 9. Water Quality Data Collected at Cypress Creek, Special Study Stations

Station ID	Location	Date	Time	TN (mg/l)	TP (mg/l)
CYPCR-01	At Myrleville Road	11/10/99	9:03	1.69	0.58
Cypress 2.1	At Scotland Road	9/18/02	15:25	0.88	0.17
Cypress 2.1	At Scotland Road	9/19/02	12:45	0.95	0.19

2.1.2 Deer Creek Water Quality Data

Nutient data for Deer Creek were gathered and reviewed. Data exist for the §303(d)-listed segment of Deer Creek based on samples collected in the creek during the §303(d)/M-BISQ monitoring project at site #223 in 2001 given in Table 10. Site #223 is located near Nod in Yazoo County upstream of the Myrleville Road bridge crossing. Data also exist at the ambient monitoring station #BB116 in 2000 located on Deer Creek near Nod in Yazoo County given in Table 11. Additionally, nutrient data exists for Deer Creek at two special study stations, given in Table 12. The average of this data for TN is 2.03 mg/l, which is greater than the target

concentration range for ecoregion 74. The average of this data for TP is 0.33mg/l, which also is greater than the target concentration range for this ecoregion.

Table 10. Water Quality Data Collected at Deer Creek, M-BISQ Station #223

Date	Time	TN (mg/l)	TP (mg/l)
1/16/01	9:07	2.01	0.34

Table 11. Water Quality Data Collected at Deer Creek, Ambient Station #BB116

Date	Time	TN (mg/l)	TP (mg/l)
2/10/00	9:52	1.64	0.36
4/6/00	10:03	2.00	0.26
6/29/00	9:11	2.28	0.46

Table 12. Water Quality Data Collected at Deer Creek, Special Study Stations

Station ID	Location	Date	Time	TN (mg/l)	TP (mg/l)
DEERCR-01	At Campbell Road	11/9/99	10:30	2.02	0.38
DER1	Off Myrleville Road	5/14/01	16:45	2.44	0.34
DER1	Off Myrleville Road	5/14/01	16:55	2.32	0.31
DER1	Off Myrleville Road	5/15/01	15:20	1.88	0.26
DER1	Off Myrleville Road	5/15/01	15:35	2.16	0.4
DER1	Off Myrleville Road	5/16/01	9:10	1.80	0.24
DER1	Off Myrleville Road	5/16/01	16:30	1.68	0.27
DER1	Off Myrleville Road	5/17/01	11:10	1.92	0.38
DER1	Off Myrleville Road	5/17/01	11:20	2.18	0.28

2.1.3 Waleasheba Creek Water Quality Data

The limited available data for Waleasheba Creek were collected during various short term studies. Nutrient data for Waleasheba Creek were gathered and reviewed. Data exist for the §303(d)-listed segment of Waleasheba Creek based on samples collected in the creek during the §303(d)/M-BISQ monitoring project at site #227 in 2001 given in Table 13. Site #227 is located near Myrleville in Yazoo County upstream of the Scotland Road bridge crossing. Additionally, nutrient data exists for Waleasheba Creek at one special study station, given in Table 14. The average of this data for TN is 1.54 mg/l, which is greater than the target concentration range for ecoregion 74. The average of this data for TP is 0.34mg/l, which also is greater than the target concentration range for this ecoregion.

Table 13. Water Quality Data Collected at Waleasheba Creek, M-BISQ Station #227

Date	Time	TN (mg/l)	TP (mg/l)
2/15/01	7:50	1.74	0.36

Table 14. Water Quality Data Collected at Waleasheba Creek, Special Study Station

Station ID	Location	Date	Time	TN (mg/l)	TP (mg/l)
WALESHEBACR-01	At Highway 433	11/9/99	9:35	1.34	0.32

2.2 Assessment of Point Sources

There is one NPDES permitted facility in the Waleasheba Watershed. The Phillips 66 Gas Station (NPDES #MS0054089) waste water treatment facility is a 0.0005 MGD (500 gallons per day) package treatment plant located approximately 7.7 miles above the beginning of the impaired segment of Waleasheba Creek. MDEQ believes this point source will not impact water quality in the listed segment of this stream and is not including it in the TMDL.

2.3 Assessment of Non-Point Sources

Non-point loading of nutrients and organic material in a water body results from the transport of the pollutants into receiving waters by overland surface runoff, groundwater infiltration, and atmospheric deposition. The two primary nutrients of concern are nitrogen and phosphorus. Total nitrogen is a combination of many forms of nitrogen found in the environment. Inorganic nitrogen can be transported in particulate and dissolved phases in surface runoff. Dissolved inorganic nitrogen can be transported in groundwater and may enter a stream from groundwater infiltration. Finally, atmospheric gaseous nitrogen may enter a stream from atmospheric deposition.

Unlike nitrogen, phosphorus is primarily transported in surface runoff when it has been sorbed by eroding sediment. Phosphorus may also be associated with fine-grained particulate matter in the atmosphere and can enter streams as a result of dry fallout and rainfall (USEPA, 1999). However, phosphorus is typically not readily available from the atmosphere or the natural water supply (Davis and Cornwell, 1988). As a result, phosphorus is typically the limiting nutrient in most non-point source dominated rivers and streams, with the exception of watersheds which are dominated by agriculture and have high concentrations of phosphorus contained in the surface runoff due to fertilizers and animal excrement or watersheds with naturally occurring soils which are rich in phosphorus (Thomann and Mueller, 1987).

Watersheds with a large number of failing septic tanks may also deliver significant loadings of phosphorus to a stream. All domestic wastewater contains phosphorus which comes from humans and the use of phosphate containing detergents. Table 15 presents typical nutrient loading ranges for various land uses.

Table 15. Nutrient Loadings for Various Land Uses

Landuse	Total Phosphorus [lb/acre-y]			Total Nitrogen [lb/acre-y]		
	Minimum	Maximum	Median	Minimum	Maximum	Median
Roadway	0.53	1.34	0.98	1.2	3.1	2.1
Commercial	0.61	0.81	0.71	1.4	7.8	4.6
Single Family-Low Density	0.41	0.57	0.49	2.9	4.2	3.6
Single Family-High Density	0.48	0.68	0.58	3.6	5.0	5.2
Multifamily Residential	0.53	0.72	0.62	4.2	5.9	5.0
Forest	0.09	0.12	0.10	1.0	2.5	1.8
Grass	0.01	0.22	0.12	1.1	6.3	3.7
Pasture	0.01	0.22	0.12	1.1	6.3	3.7

Source: Horner et al., 1994 in Protocol for Developing Nutrient TMDLs (USEPA 1999)

The drainage area of Cypress, Deer, and Waleasheba Creeks is approximately 57,346 acres or 89.6 square miles. The watershed contains many different landuse types, including urban, forest, cropland, pasture, water, and wetlands. The landuse information given below is based on data collected by the State of Mississippi's Automated Resource Information System (MARIS) 1997. This data set is based on Landsat Thematic Mapper digital images taken between 1992 and 1993. Pasture is the dominant landuse within this watershed. The landuse distribution for Cypress, Deer, and Waleasheba Creeks is shown in Table 16 and Figure 4.

Table 16. Landuse Distribution for Cypress, Deer, and Waleasheba Watersheds

In Acres	Urban	Forest	Cropland	Pasture	Scrub/Barren	Water	Wetlands
Cypress	116.9	3158.9	3957.2	11988.2	0	0	0
Percentage	0.61	16.43	20.59	62.37	0	0	0
Deer	58.2	965.0	4313.1	6851.5	0	0	0
Percentage	0.48	7.92	35.39	56.22	0	0	0
Waleasheba	132.7	10532.6	2919.2	8976.3	2676.5	50.5	648.9
Percentage	0.51	40.61	11.26	34.61	10.32	0.19	2.50
Total	307.8	14656.5	11189.5	27816	2676.5	50.5	648.9
Percentage	0.5	25.6	19.5	48.5	4.7	0.1	1.1

Figure 4. Landuse Distribution for the Five Creeks Drainage Area

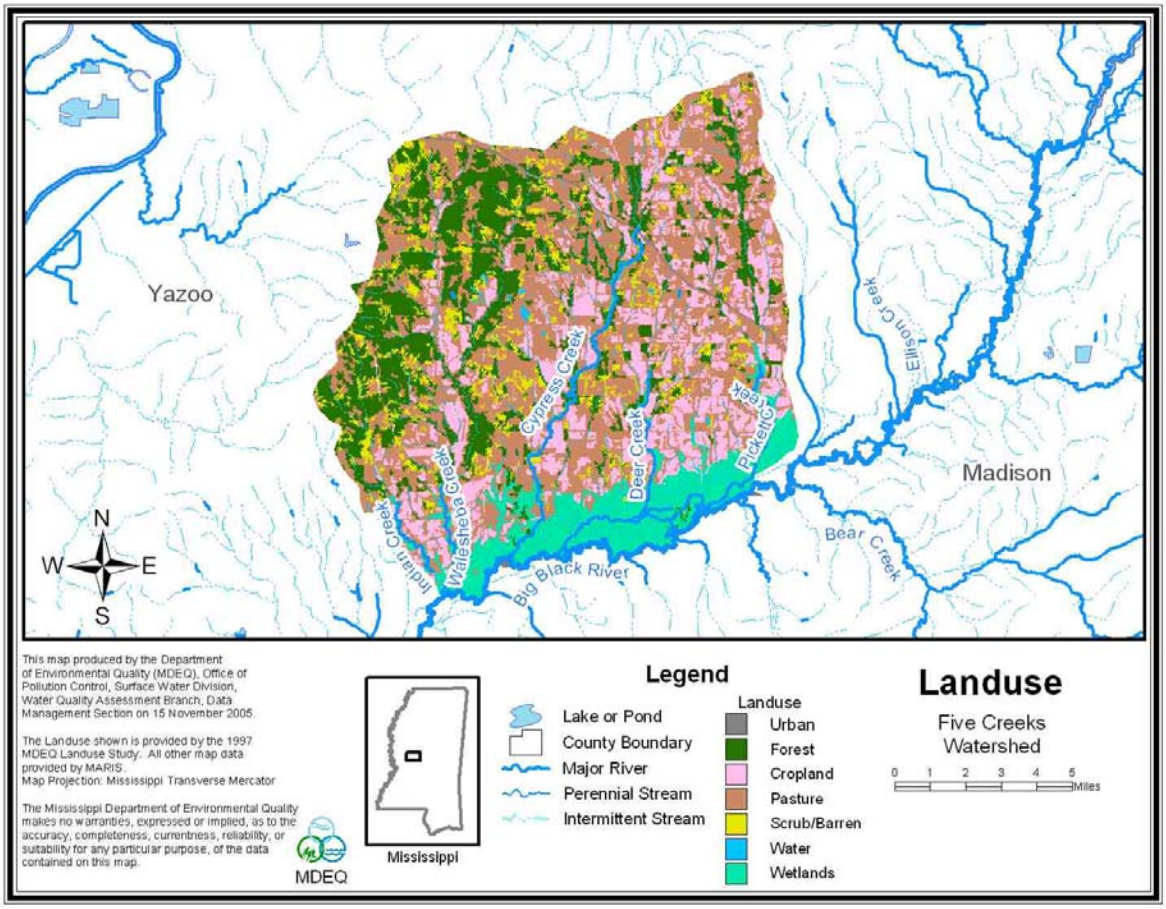

2.4 Estimated Existing Load for Total Nitrogen

The estimated existing total nitrogen concentration is based on the median total nitrogen concentrations measured in wadeable streams in Ecoregion 74 with impaired biology and elevated nutrients, which is 1.71 mg/l. The concentrations found in each stream indicate elevated TN. The targeted reductions will be based on the estimated total nitrogen level for impaired streams in Ecoregion 74.

To convert the estimated existing total nitrogen concentration to a load, the average annual flow was estimated based on flow data from the USGS gage 07290000 (Big Black River near Bovina). To estimate the amount of flow in the Five Creeks Drainage Area, a drainage area ratio was calculated (3763 cfs/2812 square miles = 1.338 cfs/square mile). The ratio was then multiplied by the drainage area of the impaired segments. The existing TN load was then calculated, using Equation 1 and the results are shown in Table 17.

Nutrient Load (lb/day) = Flow (cfs) * 5.394 (conversion factor)* Nutrient Concentration (mg/L) (Eq. 1)

Table 17. Estimated Existing Total Nitrogen Load for Cypress, Deer, and Waleasheba Creeks

Stream	Area (sq miles)	Average Annual Flow (cfs)	TN (mg/l)	TN (lbs/day)
Cypress	30.03	40.18	1.71	370.6
Deer	19.04	25.48	1.71	235.0
Waleasheba	40.53	54.23	1.71	500.2

2.5 Estimated Existing Load for Total Phosphorus

The estimated existing total phosphorus concentration is based on the median total phosphorus concentrations measured in wadeable streams in Ecoregion 74 with impaired biology and elevated nutrients, which is 0.16 mg/l. The concentrations found in each stream indicate elevated phosphorous. The targeted reductions will be based on the estimated total phosphorous level for impaired streams in Ecoregion 74.

To convert the estimated existing total phosphorus concentration to a load, the average annual flow was estimated based on flow data as previously described. The existing TP load was then calculated, using Equation 1 and the results are shown in Table 18.

Table 18. Total Phosphorus Load for Cypress, Deer, and Waleasheba Creeks

Stream	Area (sq miles)	Average Annual Flow (cfs)	TP (mg/l)	TP (lbs/day)
Cypress	30.03	40.18	0.16	34.7
Deer	19.04	25.48	0.16	22.0
Waleasheba	40.53	54.23	0.16	46.8

ALLOCATION

The allocation for this TMDL involves a wasteload allocation and a load allocation for non-point sources necessary for attainment of water quality standards in the Five Creeks Drainage Area. The nutrient portion of this TMDL is addressed through initial estimates of the existing and target TN and TP concentrations.

3.1 Wasteload Allocation

There are no point sources in the Cypress Creek or Deer Creek Drainage Areas. Therefore the waste load allocation has been set to zero for these TMDLs. As discussed in Section 2.2, there is a small NPDES permitted point source in the head waters of the Waleasheba Creek Drainage Area. MDEQ believes this point source will not impact water quality in the listed segment of this stream. Therefore the waste load allocation for TBODu has also been set to zero for Waleasheba Creek and no reduction is required. Future permits will be considered in accordance with Mississippi's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*.

3.2 Load Allocation

Best management practices (BMPs) should be encouraged in the watersheds to reduce potential TN and TP loads from non-point sources. The watersheds should be considered a priority for riparian buffer zone restoration and any nutrient reduction BMPs. For land disturbing activities related to silviculture, construction, and agriculture, it is recommended that practices, as outlined in "Mississippi's BMPs: Best Management Practices for Forestry in Mississippi" (MFC, 2000), "Planning and Design Manual for the Control of Erosion, Sediment, and Stormwater" (MDEQ, et. al, 1994), and "Field Office Technical Guide" (NRCS, 2000), be followed, respectively.

3.3 Incorporation of a Margin of Safety

The margin of safety is a required component of a TMDL and accounts for the uncertainty about the relationship between pollutant loads and the quality of the receiving water body. The two types of MOS development are to implicitly incorporate the MOS using conservative model assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this model is implicit.

3.4 Calculation of the TMDL

A predictive model was not used to calculate the dissolved oxygen TMDL due to the 7Q10 flow being zero. The TBODu TMDL has been set to zero. Equation 1 was used to calculate the TMDL for TP and TN. The target concentration was used with the average flow for the watershed to determine the TMDL, shown in Tables 19, 20, and 21. The TMDL was then compared to the estimated existing load previously calculated. The estimated existing total phosphorous concentration indicates needed reductions of 0% to 75% for Deer, Cypress, and Waleasheba Creeks. The estimated existing total nitrogen concentration indicates needed reductions of 36% to 65% for Deer, Cypress, and Waleasheba Creeks.

Table 19. Total Maximum Daily Load for Cypress Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	130.0 – 238.4	Implicit	130.0 – 238.4
Total Phosphorous	0.0	8.7 – 34.7	Implicit	8.7 – 34.7

Table 20. Total Maximum Daily Load for Deer Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	82.5 – 151.2	Implicit	82.5 – 151.2
Total Phosphorous	0.0	5.5 – 22.0	Implicit	5.5 – 22.0

Table 21. Total Maximum Daily Load for Waleasheba Creek

	WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
TBODu	0.0	0.0	Implicit	0.0
Total Nitrogen	0.0	175.5 – 321.8	Implicit	175.5 – 321.8
Total Phosphorous	0.0	11.7 – 46.8	Implicit	11.7 – 46.8

3.5 Seasonality and Critical Condition

This TMDL accounts for seasonal variability by requiring allocations that ensure year-round protection of water quality standards, including during critical conditions.

CONCLUSION

Nutrients were addressed through an estimate of a preliminary total phosphorous concentration target range and a preliminary total nitrogen concentration target range. Based on the estimated existing and target total phosphorous concentrations, this TMDL recommends a 0% - 75% reduction of the phosphorous loads entering these streams to meet the preliminary target range of 0.04 to 0.16 mg/l. Based on the estimated existing and target total nitrogen concentrations, this TMDL recommends a 36% - 65% reduction of the nitrogen loads entering these streams to meet the preliminary target range of 0.6 to 1.1 mg/l. It is recommended that the Five Creeks Watershed be considered as a priority watershed for riparian buffer zone restoration and any nutrient reduction BMPs. The implementation of these BMP activities should reduce the nutrient load entering the creeks. This will provide improved water quality for the support of aquatic life in the water bodies and will result in the attainment of the applicable water quality standards.

4.1 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Greg Jackson at Greg_Jackson@deq.state.ms.us.

All comments should be directed to Greg Jackson at Greg_Jackson@deq.state.ms.us or Greg Jackson, MDEQ, PO Box 10385, Jackson, MS 39289. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

REFERENCES

Davis and Cornwell. 1998. *Introduction to Environmental Engineering.* McGraw-Hill.

MDEQ. 2006. Stressor *Identification Report for Cypress Creek.* Office of Pollution Control.

MDEQ. 2006. Stressor *Identification Report for Deer Creek.* Office of Pollution Control.

MDEQ. 2006. Stressor *Identification Report for Waleasheba Creek.* Office of Pollution Control.

MDEQ. 2004. *Mississippi's Plan for Nutrient Criteria Development.* Office of Pollution Control.

MDEQ. 2003. Development and Application of the Mississippi Benthic Index of Stream Quality (M-BISQ). June 30, 2003. Prepared by Tetra Tech, Inc., Owings Mills, MD, for the Mississippi Department of Environmental Quality, Office of Pollution Control, Jackson, MS. (*For further information on this document, contact Randy Reed [601-961-5158*).

MDEQ. 2003. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.

USEPA. 2000. *Stressor Identification Guidance Document*. EPA/822/B-00/025. Office of Water, Washington, DC.

USEPA. 1999. *Protocol for Developing Nutrient TMDLs*. EPA 841-B-99-007. Office of Water (4503F), United States Environmental Protection Agency, Washington D.C. 135 pp.

MDEQ. 1994. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification.* Office of Pollution Control.

Telis, Pamela A. 1992. *Techniques for Estimating 7-Day, 10-Year Low Flow Characteristics for Ungaged Sites on Streams in Mississippi*. U.S. Geological Survey, Water Resources Investigations Report 91-4130.

Metcalf and Eddy, Inc. 1991. *Wastewater Engineering: Treatment, Disposal, and Reuse 3rd ed*. New York: McGraw-Hill.

Thomann and Mueller. 1987. *Principles of Surface Water Quality Modeling and Control*. New York: Harper Collins.